

ATG SMS Alarmer


Solution Overview

ATG SMS Alarmer


1. Overview

ATG SMS Alarmer is a customer premises equipment (CPE) solution for centralized monitoring service. The solution is riding on the widely available Internet, and/or SMS networks for posting, or reporting of system alarms to the monitoring center.

The following diagram shows an overview of ATG SMS Alarmer.

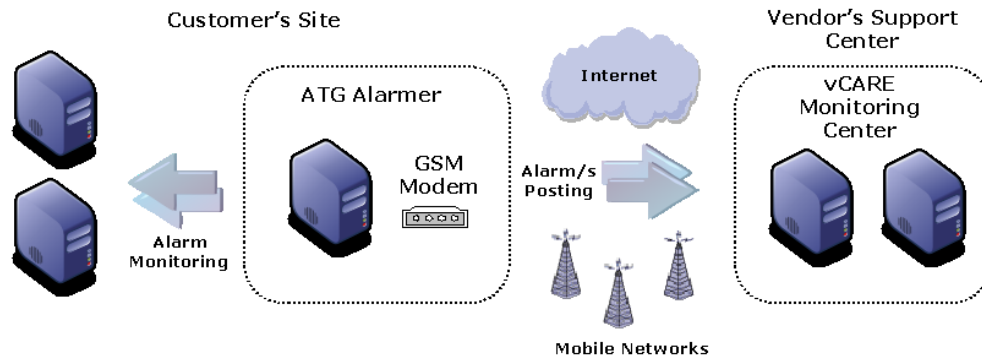

Polling of system alarm/s is implemented with Agent software that is equipment specific. This architecture allows ATG SMS Alarmer to monitor multiple types of equipment in a network, such as PABX, UPS, servers, and etc.

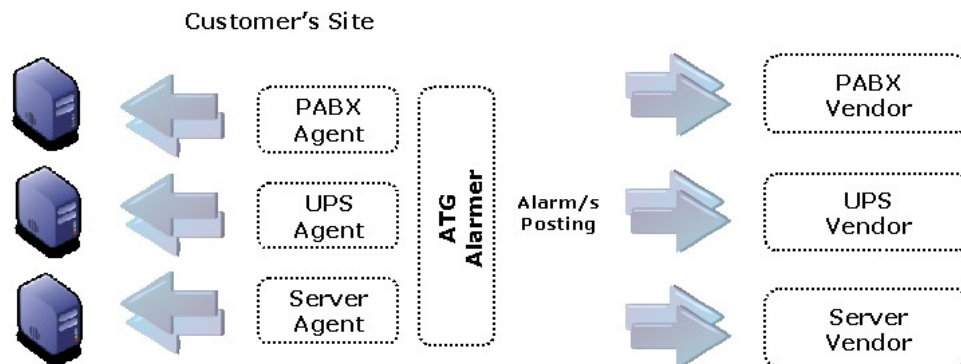



2. Technical Specifications and Requirements

2.1 ATG SMS Alarmer Package

Standard ATG SMS Alarmer package comes with the following components:

- 3.1.1 ATG SMS Alarmer Software
- 3.1.2 Agent-SERVER Agent Software
- 3.1.3 1 unit of GSM 900/1800 modem

2.2 Specifications of ATG SMS Alarmer Workstation/Server

No	Description	Specification
1	Processor	Pentium III 750MHz or above
2	RAM	128MB or above
3	Hard Disk Free Storage	10 MB or above
4	LAN Connectivity	10/100 BaseT
5	Monitor, Key Board, & Mouse.	Yes
6	USB Port	At least 1 free USB port.
7	Operating System	Windows 95, 98, ME, NT, 2000, or later.
8	Un-interruptible Power Supply	Depending on Server Spec. (Recommended)